

Version: 24/06/2020

	contains	m <sup>2</sup>	ft <sup>2</sup>	weight
1 pack Pure planks	8 planks	2.16 m <sup>2</sup>	23.24 ft <sup>2</sup>	12.5 kg
1 pallet Pure planks	56 packs	120.96 m <sup>2</sup>	1301.53 ft <sup>2</sup>	700 kg
1 pack Pure tiles	6 tiles	2.25 m <sup>2</sup>	24.21 ft <sup>2</sup>	12.97 kg
1 pallet Pure tiles	28 packs	63 m <sup>2</sup>	677.88 ft <sup>2</sup>	363 kg





## product specifications

			planks	tiles
Dimensions	EN ISO	24346	1326 x 204 mm	612 x 612 mm
Total thickness	EN ISO	24346	5 mm	
Wear layer	EN ISO	24340	0,55 mm	
Total weight	EN ISO	23997	5.61 kg/m <sup>2</sup>	
Surface treatment			PUR	
Usage classification	EN ISO	10582	23-33	
Residential warranty			lifetime	
Commercial warranty	EN ISO	10874	10 years	

## test results

Underfloor heating	EN ISO	12524	suitable max 27°C (80°F)/ electrical floorheating systems max 60 W/m <sup>2</sup>	
Castor chair	EN ISO	4918	pass	
Fire resistance	EN ISO	13501-1	Bfl-s1	
Chemical resistance	EN ISO	26987	OK	
Thermal resistance	EN ISO	8302	0,0315 m <sup>2</sup> K/W	
Residual indentation	EN ISO	24343-1	< 0,10 mm	
Slip resistance	DIN	51130	R11	
	EN ISO	13893	Class DS	
RRL pendulum test: dry	CEN/TS	15676	76	
RRL pendulum test: wet	CEN/TS	15676	50	
Sound reduction: impact sound	EN ISO	717-2	10 dB	
Reflected walking sound	EPLF	021029- F1	*** 9,2 sone	
Light fastness	EN ISO	105-B02	>6	
Dimensional stability	EN ISO	23999	≤ 0,15 %	
Antistatic	EN ISO	1815	yes	
Formaldehyde	EN ISO	717-1	E1	
VOC emission			Indoor air comfort GOLD	



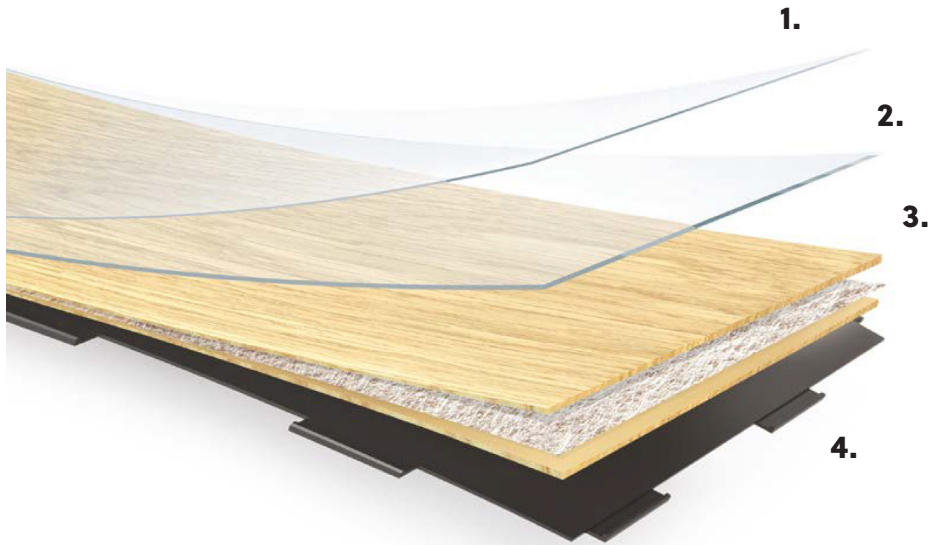

1. Protective PU lacquer
2. Wear layer 0,55 mm
3. Acoustic vinyl decor layer  
(with fiberglass)
4. Rigid Composite Board (RCB)  
with DreamClick locking elements